

INSTALLATION INSTRUCTIONS FOR BRISA LINEAR 3" BOW SURFACE MOUNT

Read and understand these instructions before installing luminaire

This luminaire is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding.

Retain these instructions for maintenance reference

IMPORTANT: ALL "FB" SERIES FIXTURES ARE J-BOX MOUNTING ONLY.

LUMINAIRE INSTALLATION (FIG.1):

- [1] Pull SUPPLY WIRES from 4" OCTAGONAL J-BOX (supplied by others) through hole in MOUNTING PLATE. Secure MOUNTING PLATE to 4" OCTAGONAL J-BOX using screws provided with 4" OCTAGONAL J-BOX.
- [2] Pull SUPPLY WIRES through center hole in BACK PAN.
- [3] Insert tabs from J-BOX COVERS into slots on MOUNTING PLATE to enclose 4" OCTAGONAL J-BOX.
- [4] While holding J-BOX COVERS in place, secure BACK PAN to MOUNTING PLATE using (2) screws provided.
- [5] While supporting BALLAST/SOCKET TRAY, Make electrical connections: Black lead to hot (Black) supply lead; White lead to neutral (White) supply lead. Uninsulated wire is a ground wire and must be connected to grounding terminal or ground (Green) supply lead (Note: Make sure BALLAST DISCONNECT is securely snapped together.).
- [6] Carefully push connections back into the 4" OCTAGONAL J-BOX.
- [7] Assemble BALLAST/SOCKET TRAY to BACK PAN using (2) #8-32 STUDS mounted in BACK PAN. Secure BALLAST/SOCKET TRAY using (2) KEPS NUTS provided (NOTE: When wall mounting luminaire vertically, install BALLAST/SOCKET TRAY so that end with (2) tabs is at top(as shown).
CAUTION: MAKE CERTAIN THAT NO WIRES ARE PINCHED BETWEEN BALLAST/SOCKET TRAY AND BACK PAN.
- [8] Install lamp.
- [9] Install LENS ASSEMBLY (see sheet 2).

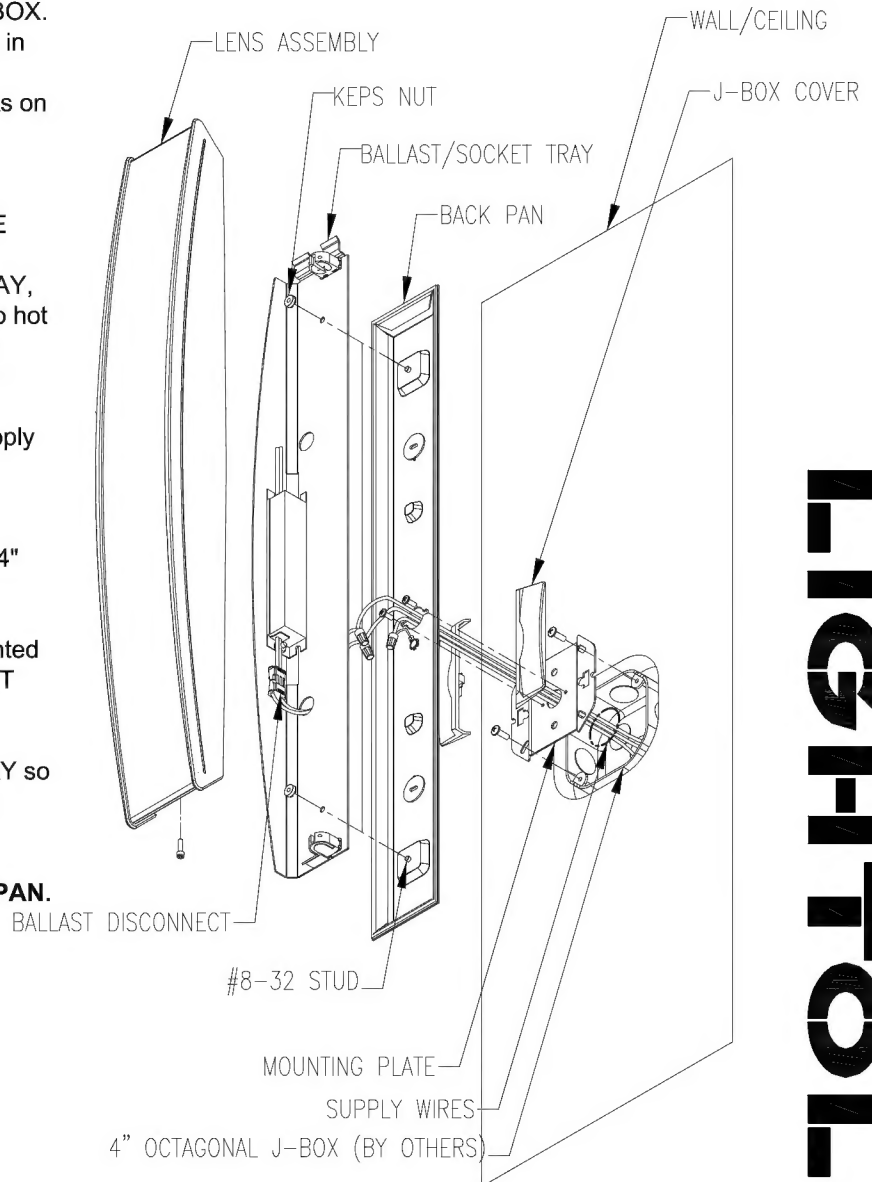


FIG. 1

LIGHTOLIER®

INSTALLATION INSTRUCTIONS FOR BRISA LINEAR 3" BOW SURFACE MOUNT

Read and understand these instructions before installing luminaire

This luminaire is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding.

Retain these instructions for maintenance reference

LENS ASSEMBLY INSTALLATION (FIG.2 & FIG.3):

1. Align LENS ASSEMBLY with LUMINAIRE ASSEMBLY. End with SOCKET CAP SCREW, in LENS ASSEMBLY, should be opposite end of BALLAST/SOCKET TRAY with (2) tabs.
2. Angle LENS ASSEMBLY (FIG.2).
3. Slide bottom edge of LENS ASSEMBLY END CAPS under TABS of BALLAST/SOCKET TRAY (FIG.3).
4. Rotate LENS ASSEMBLY down so that it sits against BACK PAN (FIG.3).
5. Tighten down SOCKET HEAD CAP SCREW.

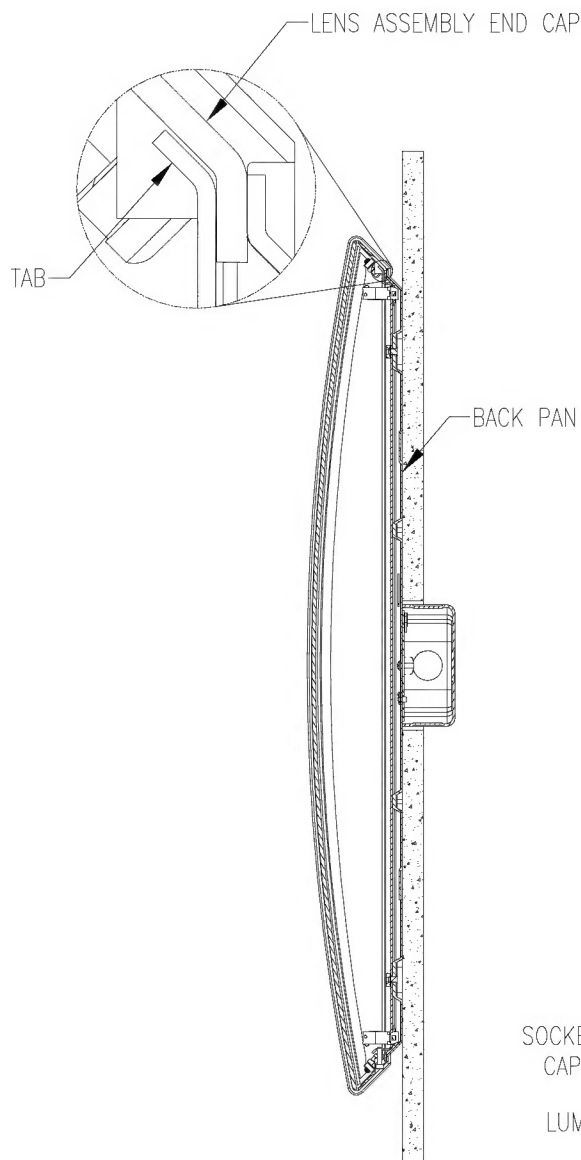


FIG. 3

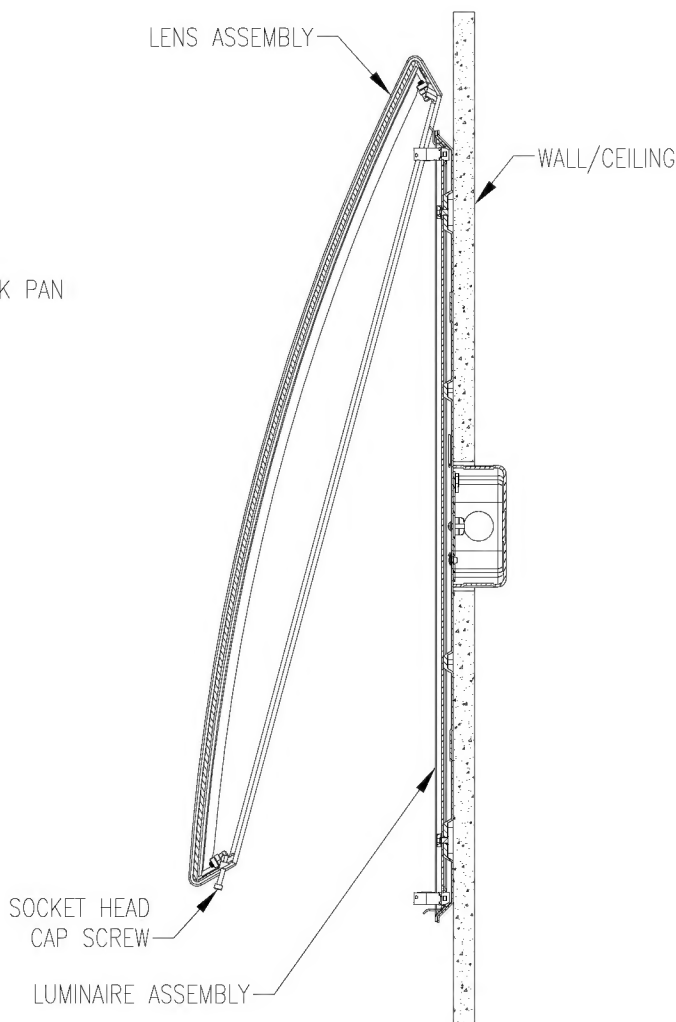


FIG. 2